


TEST REPORT

Adhesion Test 180°(점착시험)

Tested by	Reviewed by	Certified by

Lot No. (시험코드)	XYT-0.6T(171220)	Customer (납품처)	출하 전 검사
Test Date (시험일자)	2017년 12월 26일 11:34	Specification (시료규격)	25mm*100mm
Inspector (검사자)	Choi jun kyu	Material (시료재질)	
Test Spec. (시험기준)	KS T 1028	Environment (시험환경)	25'C_50%
Usage (용도)	For test	Result (결과)	

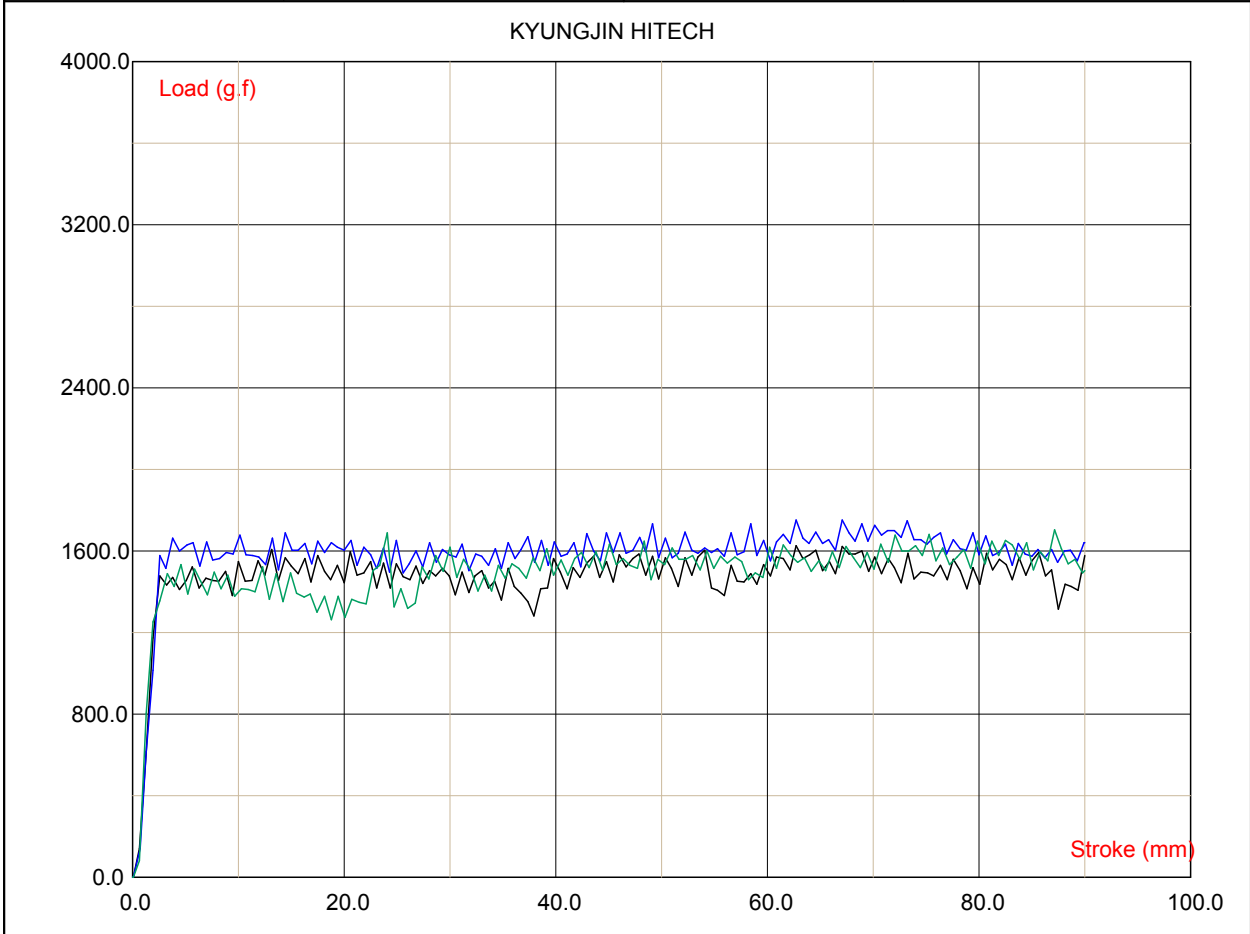

NO	Sectional Width (mm)	20mm Load (g.f)	40mm Load (g.f)	60mm Load (g.f)	80mm Load (g.f)	AVR Load (g.f)	Adhesion Strength (g.f/mm)				
No 1	0.00	1446.0	1498.0	1481.0	1440.0	1466.3	0.0				
No 2	0.00	1606.0	1577.0	1553.0	1585.0	1580.3	0.0				
No 3	0.00	1277.0	1556.0	1622.0	1539.0	1498.5	0.0				
No 4											
No 5											
No 6											
No 7											
No 8											
No 9											
No 10											
AVR	0.00	1443.0	1543.7	1552.0	1521.3	1515.0	0.0				